


TMPC0515HG-Series-T Specification

SMD Molding Type Power Inductor

APPLICATION

Tablet terminals, HDDs, SSDs, DVCs, DSCs, mobile display panels, portable game devices, Telecommunications, Consumer electronics, Compact power supply modules, other

1. Shapes and Dimensions

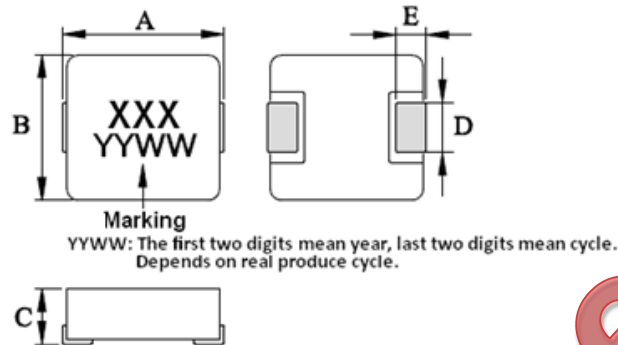

Unit: mm

Type	A	B	C	D	E
TMPC0515HG	6.2 Max.	5.2±0.3	1.3±0.2	2.5±0.3	1.1 Ref.


2. Ordering / Part Number Information

TMPC **0515** **HG** - **1R0** **M** - **T**
 (1) (2) (3) (4) (5) (6)

- (1) Product Group
- (2) Dimension Code
- (3) Type Code
- (4) Inductance Code
- (5) Inductance Tolerance
- (6) Control Code


3. Recommended Soldering Condition

3-1. Recommended Land Pattern

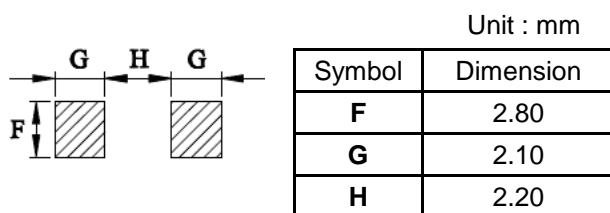

The Recommended Land pattern is for reference only.
 Please consult your manufacturing partners to ensure your company's PCB design guidelines are met

3-2. Recommended Soldering Profile

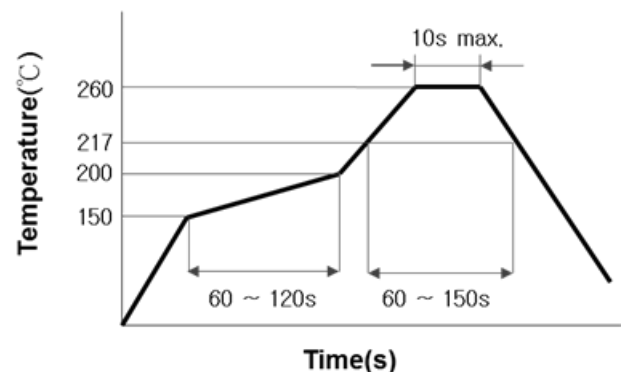

4. Electrical Characteristics

4-1. Electrical Specification

Part Number	Inductance (L) @100kHz, 1V	DC Resistance (R _{DC}) Max.	Saturation Current (I _{SAT}) Typ.	Temperature Rise Current (I _{RMS}) Typ.	Marking
TMPC0515HG-R12N-T	0.12μH±30%	3.9mΩ	28.0A	17.0A	R12
TMPC0515HG-R15N-T	0.15μH±30%	4.1mΩ	25.0A	16.0A	R15
TMPC0515HG-R20M-T	0.20μH±20%	4.2mΩ	22.5A	15.0A	R20
TMPC0515HG-R22N-T	0.22μH±30%	6.5mΩ	20.0A	12.0A	R22
TMPC0515HG-R33M-T	0.33μH±20%	9.8mΩ	16.0A	9.0A	R33
TMPC0515HG-R36M-T	0.36μH±20%	12.5mΩ	15.5A	8.5A	R36
TMPC0515HG-R47M-T	0.47μH±20%	13.8mΩ	15.0A	8.0A	R47
TMPC0515HG-R68M-T	0.68μH±20%	16.2mΩ	13.0A	7.0A	R68
TMPC0515HG-1R0M-T	1.00μH±20%	25.3mΩ	9.0A	6.0A	1R0
TMPC0515HG-1R5M-T	1.50μH±20%	45.0mΩ	7.0A	4.5A	1R5
TMPC0515HG-2R2M-T	2.20μH±20%	52.0mΩ	6.0A	4.0A	2R2
TMPC0515HG-3R3M-T	3.30μH±20%	90.0mΩ	4.5A	3.2A	3R3
TMPC0515HG-4R7M-T	4.70μH±20%	118.0mΩ	4.0A	2.7A	4R7
TMPC0515HG-5R6M-T	5.60μH±20%	152.0mΩ	3.2A	2.4A	5R6
TMPC0515HG-6R8M-T	6.80μH±20%	171.0mΩ	3.0A	2.3A	6R8
TMPC0515HG-8R2M-T	8.20μH±20%	210.0mΩ	2.6A	2.1A	8R2
TMPC0515HG-100M-T	10.0μH±20%	235.0mΩ	2.3A	2.0A	100
TMPC0515HG-150M-T	15.0μH±20%	380.0mΩ	2.0A	1.6A	150
TMPC0515HG-220M-T	22.0μH±20%	466.0mΩ	1.7A	1.2A	220

Note1. The saturation current is DC current value Inductance decrease down to 30%.

(Test by a short period of time to minimize the self-heating effect of the component.)

Note2. The temperature rise current value is the DC current value having temperature increase up to 40°C.

4-3. Operating Temperature Range

-40°C to +125°C (Including self - temperature rise)

4-4. Storage Temperature Range

Store this product under the condition of 5°C to 40°C, 20% to 70%RH and use within 6 months

5. Packaging Quantity

Standard Quantity for Packaging: 3,500 pcs/Reel

Note

1. Please make sure that your product is has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)

The specifications are subject to change or our products in it may be discontinued without advance notice.
Please check with our sales representatives or product engineers before ordering.